

LCOS 10.80

# LANCOM 1650E

## Flexible Internet access with Gigabit Ethernet



Small and medium-sized businesses often need secure and reliable access to the Internet as well as allowing mobile employees or branch offices to connect to the company headquarters. With the LANCOM 1650E and excellent LANCOM IPsec VPN, you can easily connect your sites. The connection to any DSL, cable, and fiber-optic modems offers the maximum flexibility with regard to the Internet lines available at the site. The SD-WAN functions of the branch router in combination with the LANCOM Management Cloud (LMC) not only simplify your network management, but also accelerate and automate the administration, monitoring, and rollout of your network components.

- SD-WAN – incl. zero-touch deployment and Auto-VPN via the LANCOM Management Cloud
- Flexible connection of external modems via Gigabit Ethernet
- 3 integrated IPsec VPN channels
- Network virtualization with 2 networks on one device (ARF)
- Maximum future compatibility, reliability, and security "Engineered in Germany"



LCOS 10.80

# LANCOM 1650E

## **WAN connectivity with Gigabit Ethernet**

The LANCOM 1650E enables flexible connection of external modems via Gigabit Ethernet, offering maximum independence with regard to the Internet connections available at the site.

## **LANCOM SD-WAN – Next-level networking**

With LANCOM SD-WAN you can manage and monitor your entire corporate network centrally, cost-effectively, quickly, and stress-free! In combination with the LANCOM Management Cloud, the SD-WAN gateway gives you all the options for an automated setup of secure VPN connections (Auto-VPN) between sites, including network virtualization. Highlight features such as High Scalability VPN (HSVPN) and Advanced Mesh VPN offer you a significant plus in scalability and efficiency for a large number of branches and applications. Furthermore, if multiple WAN connections are defined, they are automatically operated in active/active mode (load balancing), thereby increasing the available total bandwidth. With Dynamic Path Selection and Dynamic Traffic Steering, applications are also dynamically routed via the best connection at any given time.

## **Security with stateful inspection firewall, VLAN, and ARF**

Equipped with a stateful inspection firewall, the LANCOM SD-WAN gateway protects the entire network with functions such as intrusion prevention and denial of service protection. Logical network segmentation allows you to define individual security settings and access rights according to the requirements of the user groups, and to divide your infrastructures and applications into different areas. This network segmentation using ARF (Advanced Routing and Forwarding) and VLAN (Virtual Local Area Network) ensures that your enterprise network as a whole remains protected, even if a network segment is compromised. Learn more in the Techpaper: Advanced Routing and Forwarding.

## **Secure communication via VPN**

With virtual private networks (VPN), you use the public medium of the Internet as a communication path and secure the connection in such a way that the communication still remains completely inaccessible to external parties. This SD-WAN gateway offers you three integrated IPSec VPN channels for secure encryption, so that the protection of internal company data is always guaranteed when connecting mobile employees, home offices, or branch offices.



LCOS 10.80

# LANCOM 1650E

## Layer 2 features

VLAN 4.096 IDs based on IEEE 802.1q, dynamic assignment

Multicast IGMP-Snooping, MLD-Snooping

Protocols ARP-Lookup, LLDP, ARP, Proxy ARP, BOOTP, DHCP

## Layer 3 features

Firewall Stateful inspection firewall including packet filtering, extended port forwarding, N:N IP address mapping, packet tagging, support for DNS targets, user-defined rules and notifications

Quality of Service Traffic shaping, bandwidth reservation, DiffServ/TOS, packet size control, layer-2-in-layer-3 tagging

Security Intrusion Prevention, IP spoofing, access control lists, Denial of Service protection, detailed settings for handling reassembly, session-recovery, PING, stealth mode and AUTH port, URL blocker, password protection, programmable reset button

PPP authentication mechanisms PAP, CHAP, MS-CHAP, and MS-CHAPv2

Router IPv4-, IPv6-, NetBIOS/IP multiprotokoll router, IPv4/IPv6 dual stack

SD-WAN Application Routing SD-WAN Application Routing in connection with the LANCOM Management Cloud

SD-WAN dynamic path selection SD-WAN dynamic path selection in connection with the LANCOM Management Cloud

SD-WAN Zero Touch Deployment Zero touch commissioning of the device in conjunction with the LANCOM Management Cloud

Router virtualization ARF (Advanced Routing and Forwarding) up to separate processing of 2 contexts

IPv4 services HTTP and HTTPS server for configuration by web interface, DNS client, DNS server, DNS relay, DNS proxy, dynamic DNS client, DHCP client, DHCP relay and DHCP server including autodetection, NetBIOS/IP proxy, NTP client, SNTP server, policy-based routing, Bonjour-Proxy, RADIUS

IPv6 services HTTP and HTTPS server for configuration by web interface, DHCPv6 client, DHCPv6 server, DHCPv6 relay, DNS client, DNS server, dynamic DNS client, NTP client, SNTP server, Bonjour-Proxy, RADIUS

Dynamic routing protocols RIPv2

IPv4 protocols DNS, HTTP, HTTPS, ICMP, NTP/SNTP, NetBIOS, PPPoE (server), RADIUS, RADSEC (secure RADIUS), RTP, SNMPv1,v2c,v3, TFTP, TACACS+, IGMPv3

IPv6 protocols NDP, stateless address autoconfiguration (SLAAC), stateful address autoconfiguration (DHCPv6), router advertisements, ICMPv6, DHCPv6, DNS, HTTP, HTTPS, PPPoE, RADIUS, SMTP, NTP, Syslog, SNMPv1,v2c,v3, MLDv2, NPTv6 (NAT66)

WAN operating mode VDSL, ADSL1, ADSL2 or ADSL2+ additional with external DSL modem at an ETH port

WAN protocols PPPoE, Multi-PPPoE, GRE, EoGRE, PPTP (PAC or PNS), L2TPv2 (LAC or LNS), L2TPv3 with Ethernet-Pseudowire and IPoE (using DHCP or no DHCP), RIP-1, RIP-2, VLAN, IPv6 over PPP (IPv6 and IPv4/IPv6 dual stack session), IP(v6)oE (autokonfiguration, DHCPv6 or static)



LCOS 10.80

# LANCOM 1650E

## Layer 3 features

Tunneling protocols (IPv4/IPv6) 6to4, 6in4, 6rd (static and over DHCP), Dual Stack Lite (IPv4-in-IPv6-Tunnel), 464XLAT

## Security

Intrusion Prevention Monitoring and blocking of login attempts and port scans

IP spoofing Source IP address check on all interfaces: only IP addresses belonging to the defined IP networks are allowed

Access control lists Filtering of IP or MAC addresses and preset protocols for configuration access

Denial of Service protection Protection from fragmentation errors and SYN flooding

General Detailed settings for handling reassembly, PING, stealth mode and AUTH port

Password protection Password-protected configuration access can be set for each interface

Alerts Alerts via e-mail, SNMP traps and SYSLOG

Authentication mechanisms PAP, CHAP, MS-CHAP and MS-CHAPv2 as PPP authentication mechanism

Adjustable reset button Adjustable reset button for 'ignore', 'boot-only' and 'reset-or-boot'

## High availability / redundancy

VRRP VRRP (Virtual Router Redundancy Protocol) for backup in case of failure of a device or remote station.

FirmSafe For completely safe software upgrades thanks to two stored firmware versions, incl. test mode for firmware updates

Load balancing Static and dynamic load balancing over up to 2 WAN connections. Channel bundling with Multilink PPP (if supported by network operator)

VPN redundancy Backup of VPN connections across different hierarchy levels, e.g. in case of failure of a central VPN concentrator and re-routing to multiple distributed remote sites. Any number of VPN remote sites can be defined (the tunnel limit applies only to active connections). Up to 32 alternative remote stations, each with its own routing tag, can be defined per VPN connection. Automatic selection may be sequential, or dependant on the last connection, or random (VPN load balancing)

Line monitoring Line monitoring with LCP echo monitoring, dead-peer detection and up to 4 addresses for end-to-end monitoring with ICMP polling

## VPN

IPSec over HTTPS Enables IPSec VPN based on TCP (at port 443 like HTTPS) which can go through firewalls in networks where e. g. port 500 for IKE is blocked. Suitable for client-to-site connections and site-to-site connections. IPSec over HTTPS is based on the NCP VPN Path Finder technology

Number of VPN tunnels Max. number of concurrent active IPSec, PPTP (MPPE) and L2TPv2 tunnels: 3. Unlimited configurable connections.

Hardware accelerator Integrated hardware accelerator for 3DES/AES encryption and decryption



LCOS 10.80

# LANCOM 1650E

## VPN

Realtime clock	Integrated, buffered realtime clock to save the date and time during power failure. Assures timely validation of certificates in any case
Random number generator	Generates real random numbers in hardware, e. g. for improved key generation for certificates immediately after switching-on
1-Click-VPN Client assistant	One click function in LANconfig to create VPN client connections, incl. automatic profile creation for the LANCOM Advanced VPN Client
1-Click-VPN Site-to-Site	Creation of VPN connections between LANCOM routers via drag and drop in LANconfig
IKE, IKEv2	IPSec key exchange with Preshared Key or certificate (RSA signature, ECDSA-Signature, digital signature)
Certificates	X.509 digital multi-level certificate support, compatible with Microsoft Server / Enterprise Server and OpenSSL. Secure Key Storage protects a private key (PKCS#12) from theft.
Certificate rollout	Automatic creation, rollout and renewal of certificates via SCEP (Simple Certificate Enrollment Protocol) per certificate hierarchy
Certificate revocation lists (CRL)	CRL retrieval via HTTP per certificate hierarchy
OCSP Client	Check X.509 certifications by using OCSP (Online Certificate Status Protocol) in real time as an alternative to CRLs
XAUTH	XAUTH client for registering LANCOM routers and access points at XAUTH servers incl. IKE-config mode. XAUTH server enables clients to register via XAUTH at LANCOM routers. Connection of the XAUTH server to RADIUS servers provides the central authentication of VPN-access with user name and password. Authentication of VPN-client access via XAUTH and RADIUS connection additionally by OTP token
RAS user template	Configuration of all VPN client connections in IKE ConfigMode via a single configuration entry
Proadaptive VPN	Automated configuration and dynamic creation of all necessary VPN and routing entries based on a default entry for site-to-site connections.
Algorithms	3DES (168 bit), AES-CBC and -GCM (128, 192 or 256 bit), RSA (1024-4096 bit), ECDSA (P-256-, P-384-, P-521-curves) and Chacha20-Poly 1305. OpenSSL implementation with FIPS-140 certified algorithms. MD-5, SHA-1, SHA-256, SHA-384 or SHA-512 hashes
NAT-Traversal	NAT-Traversal (NAT-T) support for VPN over routes without VPN passthrough
LANCOM Dynamic VPN	Enables VPN connections from or to dynamic IP addresses. The IP address is communicated via the ICMP or UDP protocol in encrypted form. Dynamic dial-in for remote sites via connection template
Dynamic DNS	Enables the registration of IP addresses with a Dynamic DNS provider in the case that fixed IP addresses are not used for the VPN connection
Specific DNS forwarding	DNS forwarding according to DNS domain, e.g. internal names are translated by proprietary DNS servers in the VPN. External names are translated by Internet DNS servers
Split DNS	Allows the selective forwarding of traffic for IKEv2 depending on the addressed DNS domain.
IPv4 VPN	Connecting private IPv4 networks



LCOS 10.80

# LANCOM 1650E

## VPN

IPv4 VPN over IPv6 WAN	Use of IPv4 VPN over IPv6 WAN connections
IPv6 VPN	Connecting private IPv6 networks
IPv6 VPN over IPv4 WAN	Use of IPv6 VPN over IPv4 WAN connections
Radius	RADIUS authorization and accounting, outsourcing of VPN configurations in external RADIUS server in IKEv2, RADIUS CoA (Change of Authorization)
High Scalability VPN (HSVPN)	Transmission of multiple, securely separated networks within a VPN tunnel
Advanced Mesh VPN	On demand dynamic VPN tunnel establishment between branches

## Performance

Routing-Performance	Data regarding the overall routing performance can be found inside the LANCOM tech paper "Routing-Performance" on <a href="http://www.lancom-systems.com">www.lancom-systems.com</a>
---------------------	--

## VoIP

SIP ALG	The SIP ALG (Application Layer Gateway) acts as a proxy for SIP communication. For SIP calls the ALG opens the necessary ports for the corresponding media packets. Automatic address translation (STUN is no longer needed).
---------	---

## Interfaces

WAN: Ethernet	10/100/1000 Mbps Gigabit Ethernet
Ethernet ports	3 individual 10/100/1000 Mbps Ethernet ports; up to 3 ports can be operated as additional WAN ports with load balancing. Ethernet ports can be electrically disabled within LCOS configuration. The ports support energy saving according to IEEE 802.3az
Port configuration	Each Ethernet port can be freely configured (LAN, DMZ, WAN, monitor port, off). LAN ports can be operated as a switch or separately. Additionally, external DSL modems or termination routers can be operated as a WAN port with load balancing and policy-based routing. DMZ ports can be operated with their own IP address range without NAT
USB 2.0 host port	USB 2.0 hi-speed host port for connecting USB printers (USB print server), LANCOM Wireless ePaper USB stick, USB data storage (FAT file system); bi-directional data exchange is possible
Serial interface	Serial configuration interface / COM port (USB-C): 9,600 - 115,000 baud.

## Management and monitoring

Management	LANCOM Management Cloud, LANconfig, WEBconfig, LANCOM Layer 2 management (emergency management)
Management functions	Alternative boot configuration, voluntary automatic updates for LCMS and LCOS, individual access and function rights up to 16 administrators, RADIUS and RADSEC user management, remote access (WAN or (W)LAN, access rights (read/write) adjustable separately), SSL, SSH, HTTPS, Telnet, TFTP, SNMP, HTTP, access rights via TACACS+, scripting, timed control of all parameters and actions through cron job
FirmSafe	Two stored firmware versions, incl. test mode for firmware updates



LCOS 10.80

# LANCOM 1650E

## Management and monitoring

automatic firmware update	configurable automatic checking and installation of firmware updates
Monitoring	LANCOM Management Cloud, LANmonitor, WLANmonitor
Monitoring functions	Device SYSLOG, SNMPv1,v2c,v3 incl. SNMP-TRAPS, extensive LOG and TRACE options, PING and TRACEROUTE for checking connections, internal logging buffer for firewall events
Monitoring statistics	Extensive Ethernet, IP and DNS statistics; SYSLOG error counter, accounting information exportable via LANmonitor and SYSLOG
IPerf	IPerf is a tool for measurements of the bandwidth on IP networks (integrated client and server)
SLA-Monitor (ICMP)	Performance monitoring of connections
Netflow	Export of information about incoming and outgoing IP traffic
SD-LAN	SD-LAN – automatic LAN configuration via the LANCOM Management Cloud
SD-WAN	SD-WAN – automatic WAN configuration via the LANCOM Management Cloud

## Hardware

Environment	Temperature range 0–40°C; humidity 0–95%; non-condensing
Housing	Robust synthetic housing, rear connectors, ready for wall mounting, Kensington lock; 210 x 45 x 140 mm (W x H x D)
Fans	None; fanless design without rotating parts, high MTBF
Power consumption (max./idle)	15 watt / 6 watt

## Declarations of conformity\*

Europe/EFTA	CE
IPv6	IPv6 Ready Gold
Country of Origin	Made in Germany
*) Note	You will find all declarations of conformity on our website at <a href="http://www.lancom-systems.com/doc">www.lancom-systems.com/doc</a>

## Scope of delivery

Manual	Quick Installation Guide (DE/EN)
Cable	1 Ethernet cable, 3 m
Power supply unit	External power adapter (230 V), NEST 12 V/2.0 A DC/S, coaxial power connector 2.1/5.5 mm, temperature range from -5 to +45° C, LANCOM item no. 111303 (EU)



LCOS 10.80

# LANCOM 1650E

## Support

Warranty extension	Free warranty extension up to 3 years (replacement service for defects) For details, please refer to the service and support conditions at <a href="http://www.lancom-systems.com/support-conditions">www.lancom-systems.com/support-conditions</a> or at <a href="http://www.lancom.de/rma">www.lancom.de/rma</a> .
Security updates	Up to 2 years after End of Sale of the device (but min. 3 years, see <a href="http://www.lancom-systems.com/product-tables">www.lancom-systems.com/product-tables</a> ), can be extended by purchasing LANcare products
Software updates	Regular free updates including new features as part of the LANCOM Lifecycle Management ( <a href="http://www.lancom-systems.com/lifecycle">www.lancom-systems.com/lifecycle</a> )
Manufacturer support	For LANcommunity partners up to the End of Life of the device For end customers with LANcare Direct or LANcare Premium Support during the LANcare validity
LANcare Basic S	Security updates until EOL (min. 5 years) and 5 years replacement service with shipment of the replacement device within 5 days after arrival of the defective device (8/5/5Days), item no. 10720
LANcare Advanced S	Security updates until EOL (min. 5 years) and 5 years NBD advance replacement with delivery of the replacement device within one business day (8/5/NBD), item no. 10730
LANcare Direct Advanced 24/7 S	Direct, prioritized 10/5 manufacturer support incl. 24/7 emergency hotline and security updates for the device, NBD advance replacement with delivery of the device on the next business day (24/7/NBD), guaranteed first response times (SLA) of max. 30 minutes for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years (item no. 10776, 10777 or 10778)
LANcare Direct 24/7 S	Direct, prioritized 10/5 manufacturer support incl. 24/7 emergency hotline and security updates for the device, guaranteed first response times (SLA) of max. 30 minutes for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years (item no. 10752, 10753 or 10754)
LANcare Direct Advanced 10/5 S	Direct, prioritized 10/5 manufacturer support and security updates for the device, NBD advance replacement with delivery of the device on the next business day (10/5/NBD), guaranteed first response times (SLA) of max. 2 hours for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years.(item no. 10764, 10765 or 10766)
LANcare Direct 10/5 S	Direct, prioritized 10/5 manufacturer support and security updates for the device, guaranteed first response times (SLA) of max. 2 hours for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years.(item no. 10740, 10741 or 10742)

## Software

Lifecycle Management	After discontinuation (End of Sale), the device is subject to the LANCOM Lifecycle Management. Details can be found at: <a href="http://www.lancom-systems.com/lifecycle">www.lancom-systems.com/lifecycle</a>
Anti-backdoor policy	Products from LANCOM are free of hidden access paths (backdoors) and other undesirable features for introducing, extracting or manipulating data. The trust seal "IT Security made in Germany" (ITSMIG) and certification by the German Federal Office for Information Security (BSI) confirm the trustworthiness and the outstanding level of security.

## Options

LANCOM Content Filter	LANCOM Content Filter +10 user (additive up to 25), 1 year subscription, item no. 61590
-----------------------	---





LCOS 10.80

# LANCOM 1650E

## Options

LANCOM Content Filter	LANCOM Content Filter +25 user (additive up to 25), 1 year subscription, item no. 61591
LANCOM Content Filter	LANCOM Content Filter +10 user (additive up to 25), 3 year subscription, item no. 61593
LANCOM Content Filter	LANCOM Content Filter +25 user (additive up to 25), 3 year subscription, item no. 61594
LANCOM BPjM Filter	LANCOM BPjM Filter Option, 5 years subscription, item no. 61418
LANCOM All-IP Lizenz Option	Upgrade option for the operation of the LANCOM routers with All-IP connections, support of PBX systems and telephony devices as well as voice & fax services, incl. Voice Call Manager, item no. 61419
LANCOM VoIP +10 Option	Upgrade for LANCOM VoIP router with 10 additional internal VoIP numbers (additionally up to 40) and 10 external SIP lines (additionally up to 55) item no. 61423

## LANCOM Management Cloud




LANCOM LMC-A-1Y LMC License	LANCOM LMC-A-1Y License (1 Year), enables the management of one category A device for one year via the LANCOM Management Cloud, item no. 50100
LANCOM LMC-A-3Y LMC License	LANCOM LMC-A-3Y License (3 Years), enables the management of one category A device for three years via the LANCOM Management Cloud, item no. 50101
LANCOM LMC-A-5Y LMC License	LANCOM LMC-A-5Y License (5 Years), enables the management of one category A device for five years via the LANCOM Management Cloud, item no. 50102

## Accessories

VPN Client Software	LANCOM Advanced VPN Client for Windows 7,8/8.1,10,11 - single license, item no. 61600
VPN Client Software	LANCOM Advanced VPN Client for Mac OS X (10.5 Intel only, 10.6 or higher), single license, item no. 61606

## Item number(s)

LANCOM 1650E (EU)	62163
-------------------	-------

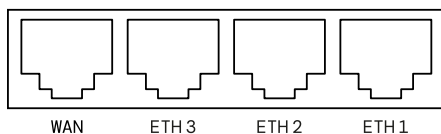

LANCOM Systems GmbH  
 A Rohde & Schwarz Company  
 Adenauerstr. 20/B2  
 52146 Wuerselen | Germany  
 info@lancom.de | www.lancom-systems.com

LANCOM, LANCOM Systems, LCOS, LANcommunity and Hyper Integration are registered trademarks. All other names or descriptions used may be trademarks or registered trademarks of their owners. This document contains statements relating to future products and their attributes. LANCOM Systems reserves the right to change these without notice. No liability for technical errors and/or omissions. 05/24