

LANCOM GS-3528X

Multi-Gigabit Ethernet access switch for data-intensive networks



This 28-port multi-Gigabit access switch is the ideal solution for data-intensive infrastructures. With 12x 2.5-Gigabit Ethernet ports, it provides the high-performance basis necessary for operating Wi-Fi 6 access points and other network components with high performance requirements. Also featuring 12x Gigabit Ethernet ports, 4x SFP+ ports, and basic layer-3 features such as static routing and DHCP server, this is the expert device for smart management with numerous security features for small and medium-sized networks.

- Multi-Gigabit access switch with 12x 2.5-Gigabit Ethernet ports, 12x 1-Gigabit Ethernet ports, and 4x SFP+
- Basic layer-3 features like static routing and DHCP server
- Security with configurable access control on all ports as per IEEE 802.1X
- Secure remote management through TACACS+, SSH, SSL, and SNMPv3
- Ideal in combination with Wi-Fi 6 access points
- SD-LAN – for quick and easy configuration via the LANCOM Management Cloud
- IPv6 and IPv4 support for modern enterprise networks
- 5-year warranty on all components

LANCOM GS-3528X

High power output on 28 ports

The LANCOM GS-3528X is equipped with 12x 2.5-Gigabit Ethernet ports and 4 SFP+ ports that support transmission rates of up to 10 Gbps. With a data throughput of 164 Gbps on the backplane, it offers full performance even under load. This makes the multi-Gigabit access switch a high-performance basis for modern network infrastructures in any industry or field of application.

A high-performance basis for Wi-Fi 6

Thanks to 12 high-performance 2.5-Gigabit Ethernet ports, the LANCOM GS-3528X is the ideal LAN-side basis for integrating the new Wi-Fi 6 standard into modern infrastructures. The increased data rates when using Wi-Fi 6 requires 2.5-Gigabit Ethernet, as the performance requirements exceed those of a 1-Gigabit Ethernet port. This switch enables the operation of up to 12 Wi-Fi 6 access points or other network components with high performance requirements.

Static routing for fast data exchange

The LANCOM GS-3528X supports the basic layer-3 feature static routing and thus the shift of certain routing tasks from the router to the switch. Administrator-predefined network routes, through one or multiple network segments, enable fast data transfer especially in scenarios with high data volumes and relieve the router accordingly. Newly available router capacities can then additionally be used to manage external data traffic. As a result, the entire network efficiency is increased.

DHCP server functionality

As a DHCP server, the switch is able to independently and automatically assign IP addresses to clients. The LANCOM GS-3528X supports this basic layer-3 function and thus takes over the IP management of the connected network.

Configurable access control

The LANCOM GS-3528X excludes rogue clients from gaining unauthorized access to the network. This is ensured by secured access control on all ports as per IEEE 802.1X (port-based, single-based, multi-based, and MAC-based).

Secure remote management

Secure communication protocols such as SSH, SSL and SNMPv3 make the LANCOM GS-3528X ideal for professional remote network management. The switch also support the TACACS+ protocol for authentication, authorization, and accounting. This optimized solution promises maximum security for multi-site network management and monitoring.

LANCOM GS-3528X

SD-LAN - days become minutes

The LANCOM GS-3528X offers fast and easy network integration and automatic configuration assignment with the LANCOM Management Cloud - without manual configuration. In this way, even complex networking scenarios are easy to administer. SD-LAN eliminates the need for a single device configuration for holistic network orchestration. In addition, automatic VLAN assignment to the desired switch ports is possible. The configurations can be coordinated with each other across locations and network architectures, and at the same time rolled out or updated at the click of a mouse.

LANCOM GS-3528X

Security

Secure Shell Protocol (SSH)	SSH for a secure remote configuration
Secure Sockets Layer (SSL)	SSL to encrypt HTTP connections; advanced security for browser-based configuration via web interface
IEEE 802.1X	IEEE 802.1X access control on all ports; RADIUS for authentication, authorization and accounting with e.g. MD5 hashing; guest VLAN; dynamic VLAN assignment
Private VLAN edge	Layer 2 isolation between clients in the same VLAN ("protected ports"); support multiple uplinks
Port security	Locking of MAC addresses to ports; limiting of the number of learned MAC addresses
IP source guard	Blocking access for illegal IP addresses on specific ports
Access control lists	Drop or rate limitation of connections based on source and destination MAC addresses, VLAN ID, IP address (IPv4/IPv6), protocol, port, DSCP/IP precedence, TCP/UDP source and destination ports, IEEE 802.1p priority, ICMP packets, IGMP packets, TCP flag
RADIUS/TACACS+	Authentication, authorization and accounting of configuration changes by RADIUS or TACACS+
Storm Control	Multicast/Broadcast/Unicast storm suppression
Isolated Group	Allows certain ports to be designated as protected. All other ports are non-isolated. Traffic between isolated group members is blocked. Traffic can only be sent from isolated group to non-isolated group.

Performance

Switching technology	Store and forward with latency less than 4 microseconds
MAC addresses	Support of max 32K MAC addresses
Throughput	Max. 164 Gbps on the backplane
Maximum packet processing	122 million packets per second (mpps) at 64-byte packets
VLAN	Port based and IEEE 802.1q tag based VLAN with up to 4,093 VLAN; Supports ingress and egress packet filter in port based VLAN
Jumbo frame support	Jumbo frame support with up to 10240 bytes

Energy efficiency (Green Ethernet)

Energy detection	Energy efficiency according to IEEE 802.3az. Automatically turns off power on Gigabit Ethernet RJ-45 port when detecting link down or Idle of client. Active mode is resumed without loss of any packets when the switch detects the link up
Cable length detection	Adjusts the signal strength based on the cable length. Reduces the power consumption for short cable

Layer 3 features

Number of L3 interfaces	up to 128
-------------------------	-----------

LANCOM GS-3528X

Layer 3 features

Static routing (IPv4/IPv6)	Hardware based static routing (IPv4/IPv6) with a number of 128 possible routes
DHCP Server	DHCP Server per VLAN

Layer 2 switching

Spanning Tree Protokoll (STP) / Rapid STP / Multiple STP	Standard Spanning Tree according to IEEE 802.1d with fast convergence support of IEEE 802.1w (RSTP); using Multiple Spanning Tree instances by default according to IEEE 802.1s (MSTP)
Link Aggregation Control Protocol (LACP)	Support of 26 groups containing up to 4 ports each according to IEEE 802.3ad
VLAN	Support for up to 4K VLANs simultaneously (out of 4093 VLAN Ids); matching due to port, IEEE 802.1q tagged VLANs, MAC addresses, IP subnet and Private VLAN Edge function ("protected ports")
Voice VLAN	Voice traffic is automatically assigned to a voice-specific VLAN and treated with appropriate levels of QoS
IGMP multicasts	IGMP v1, v2, v3 to limit bandwidth-intensive multicast traffic to ports with requesters; supports 1024 multicast groups; source-specific multicasting
IGMP querier	Support of multicast domains of snooping switches in the absence of a multicast router
IGMP proxy	IGMP proxy to pass IGMP messages through
Generic VLAN registration	VLAN registration with GVRP according to IEEE 802.1q for automatic delivery of VLANs in bridged domains
DHCP Relay Agent	Relay of DHCP broadcast request to different LANs
Supported DHCP options	→ DHCP option 66 → DHCP option 67 → DHCP option 82

Interfaces

Ethernet	→ 12 TP ports 100/1000/2500 Mbps → 12 TP ports 10/100/1000 Mbps → 4 SFP+ ports 1/10 Gbps → 28 concurrent Ethernet ports in total
Console port	RJ45 configuration port for command line access

Management and monitoring

Management	LANconfig, WEBconfig, LANCOM Management Cloud, Industry Standard CLI
Command Line Interface (CLI)	Configuration and status display from the command line with console application and direct connection to console port, via Telnet or SSH
Monitoring	LANmonitor, LANCOM Management Cloud

LANCOM GS-3528X

Management and monitoring

Remote Monitoring	Integrated RMON software agent supports 4 RMON groups (history, statistics, alarms and events) for enhanced traffic management, monitoring and analysis
Port Mirroring	Traffic can be mirrored from on port to another for investigation with network analyzer or RMON probe. Up to 27 ports can be mirrored to a single mirror port. Single sessions can be selected
Security	Access rights (read/write) can be set up separately, access control list
SNMP	SNMP management via SNMPv1, v2c or v3 with support of traps. User-based security model for SNMPv3 (USM)
Diagnosis	Diagnosis from the switch with PING and cable diagnosis
Firmware update	<ul style="list-style-type: none"> → Update via WEBconfig and browser (HTTP/HTTPS) → Update via TFTP and LANconfig → Dual firmware image to update during operation
Secure Copy	Securely import and export files
DHCP client	Automatic assignment of the management IP address by DHCP
SNTP	Automatic time settings with Simple Network Time Protocol (SNTP)
s-flow	Standard for monitoring of high-speed-networks. Visualization of network use, accounting an analysis to protect your network against dangers

Hardware

Weight	8,82 lbs (4,0 kg)
Power supply	Internal power supply unit (100 – 240 V, 50 – 60 Hz)
Environment	Temperature range 0 – 40° C; short term temperature conditions 0 – 50°C; humidity 10 – 90%; non-condensing
Housing	Robust metal housing, 19" 1U (442 x 44 x 375 mm > W x H x D) with removable mounting brackets, network connectors on the front
Fans	1
Power consumption (max)	50 W
Power consumption (idle)	20 W
Heat power (max)	170 BTU/h
Acoustic noise (typ)	48 dBa

Software

LCOS version	based on LCOS SX 4.00
--------------	-----------------------

LANCOM GS-3528X

Software

Software Lifecycle Management After discontinuation, the device is subject to the LANCOM Software Lifecycle Management. Details can be found at: www.lancom.de/lifecycle

Anti-backdoor policy Products from LANCOM are free of hidden access paths (backdoors) and other undesirable features for introducing, extracting or manipulating data. The trust seal "IT Security made in Germany" (ITSMIG) and certification by the German Federal Office for Information Security (BSI) confirm the trustworthiness and the outstanding level of security

Declarations of conformity*

Europe/EFTA CE

North America FCC/IC

Australia / New Zealand ACMA

***) Note** The full text of the specific Declaration of Conformity is available at the following Internet address: www.lancom-systems.com/doc

Supported IEEE standards

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)

IEEE 802.1AB LLDP-MED

IEEE 802.1ad Q-in-Q tagging

IEEE 802.1ak MRP and MVRP - Multiple Registration Protocol and Multiple VLAN Registration Protocol

IEEE 802.1d MAC Bridging

IEEE 802.1d Spanning Tree

IEEE 802.1p Class of Service

IEEE 802.1q VLAN

IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)

IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)

IEEE 802.1X Port Based Network Access Control

IEEE 802.3 10Base-T Ethernet

IEEE 802.3ab 1000Base-TX Ethernet

IEEE 802.3ad Link Aggregation Control Protocol (LACP)

IEEE 802.3ae 10 Gigabit Ethernet over fiber

LANCOM GS-3528X

Supported IEEE standards

IEEE 802.3az	Energy Efficient Ethernet
IEEE 802.3bz	2.5GBASE-T Ethernet
IEEE 802.3u	100Base-T Ethernet
IEEE 802.3x	Flow Control
IEEE 802.3z	1000Base-X Ethernet

Supported RFC standards

RFC 854	Telnet Protocol Specification
RFC 1213	MIB II
RFC 1215	SNMP Generic Traps
RFC 1493	Bridge MIB
RFC 1769	Simple Network Time Protocol (SNTP)
RFC 2021	Remote Network Monitoring MIB v2 (RMONv2)
RFC 2233	Interface MIB
RFC 2460	Internet Protocol Version 6 (IPv6)
RFC 2613	SMON MIB
RFC 2617	HTTP Authentication
RFC 2665	Ethernet-Like MIB
RFC 2674	IEEE 802.1p and IEEE 802.1q Bridge MIB
RFC 2818	Hypertext Transfer Protocol Secure (HTTPS)
RFC 2819	Remote Network Monitoring MIB (RMON)
RFC 2863	Interface Group MIB using SMIv2
RFC 2933	IGMP MIB
RFC 3019	MLDv1 MIB
RFC 3414	User based Security Model for SNMPv3
RFC 3415	View based Access Control Model for SNMP

LANCOM GS-3528X

Supported RFC standards

RFC 3587	IPv6 Global Unicast Address Format
RFC 3635	Ethernet-Like MIB
RFC 3636	IEEE 802.3 MAU MIB
RFC 4133	Entity MIBv3
RFC 4188	Bridge MIB
RFC 4251	The Secure Shell Protocol Architecture (SSH)
RFC 4291	IP Version 6 Addressing Architecture
RFC 4443	Internet Control Message Protocol (ICMPv6)
RFC 4668	RADIUS Authentication Client MIB
RFC 4670	RADIUS Accounting MIB
RFC 5519	Multicast Group Membership Discovery MIB
RFC 7513	DHCP Snooping
RFC 5519	IGMP- and MLD-Snooping

Scope of delivery

Manual	Hardware Quick Reference (DE/EN), Installation Guide (DE/EN)
Cable	Serial configuration cable, 1.5m
Cable	IEC power cord
19" brackets	Two 19" brackets for rackmounting

Support

Warranty	5 years, for details, please refer to the General Warranty Conditions at: www.lancom-systems.com/warranty-conditions
LANCOM support	Free technical manufacturer support as part of the LANCOM Software Lifecycle Management www.lancom.de/lifecycle
LANcare Advanced M	Service package with security updates and support entitlement* until EOL and 5 years NBD advance replacement (* support access required, e.g. support contract or LANCOM Service Packs 24/7 or 10/5), item no. 10731

LANCOM Management Cloud

LANCOM LMC-B-1Y LMC License	LANCOM LMC-B-1Y License (1 Year), enables the management of one category B device for one year via the LANCOM Management Cloud, item no. 50103
-----------------------------	--

LANCOM GS-3528X

LANCOM Management Cloud

LANCOM LMC-B-3Y LMC License LANCOM LMC-B-3Y License (3 Years), enables the management of one category B device for three years via the LANCOM Management Cloud, item no. 50104

LANCOM LMC-B-5Y LMC License LANCOM LMC-B-5Y License (5 Years), enables the management of one category B device for five years via the LANCOM Management Cloud, item no. 50105

Accessories*

1000Base-SX SFP module LANCOM SFP-SX-LC1, item no. 61556

1000Base-LX SFP module LANCOM SFP-LX-LC1, item no. 61557

1000Base-SX SFP BiDi module LANCOM SFP-BiDi1550-SC, item no. 60201

10GBase-SX SFP module LANCOM SFP-SX-LC10, item no. 61485

10GBase-LX SFP module LANCOM SFP-LX-LC10, item no. 61497

10GBase-SX SFP BiDi module LANCOM SFP-BiDi1310-LC10, item no. 60202

10G multi gigabit Ethernet copper module LANCOM SFP-CO10-MG, Art.-Nr.: 60170

10G Direct Attach Cable 1m LANCOM SFP-DAC10-1m, Art.-Nr.: 61495

10G Direct Attach Cable 3m LANCOM SFP-DAC10-3m, Art.-Nr.: 60175

LANCOM Power Cord (UK) IEC power cord, UK plug, item no. 61650

LANCOM Power Cord (CH) IEC power cord, CH plug, item no. 61652


LANCOM Power Cord (US) IEC power cord, US plug, item no. 61651

LANCOM Power Cord (AU) IEC power cord, AU plug, item no. 61653

*) Note Support for third-party accessories (SFP and DAC) is excluded and cannot be granted

Item number(s)

LANCOM GS-3528X 61496

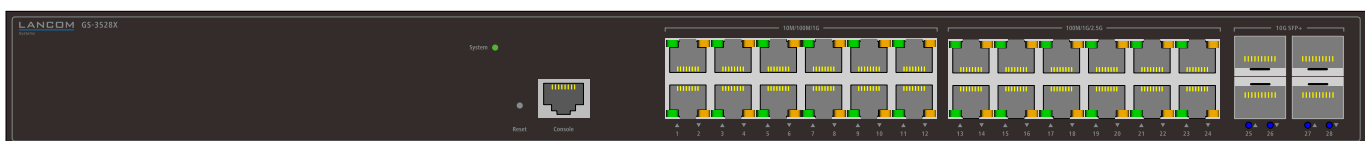

LANCOM Systems GmbH
 Adenauerstr. 20/B2
 52146 Wuerselen | Germany
 info@lancom.de
 www.lancom-systems.com

LANCOM, LANCOM Systems, LCOS, LANcommunity and Hyper Integration are registered trademarks. All other names or descriptions used may be trademarks or registered trademarks of their owners. This document contains statements relating to future products and their attributes. LANCOM Systems reserves the right to change these without notice. No liability for technical errors and/or omissions. 04/23